



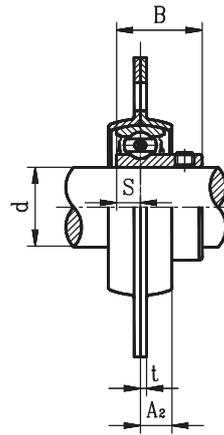


PRESSED HOUSING ROUND FLANGE UNITS

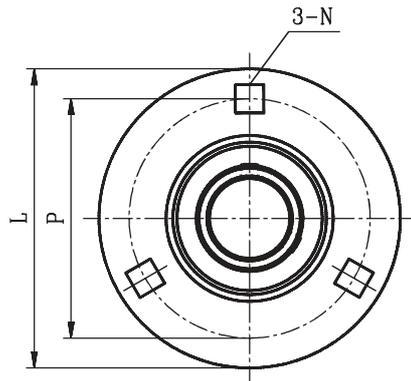

SBPF2

Setscrew type

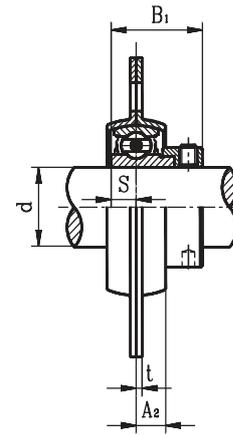

SAPF2

Eccentric locking collar type

Unit No.	Shaft Dia.		Dimensions (mm)							Bolt size		Bearing No.	Housing No.	Mass (kg)
	d		L	P	A ₂	t	N ^Ø	S	B					
	(in.)	(mm)												
SBPF201 201-8	1/2	12										SB201 201-8		0.27
202		15	82	64	7	2	7.5	6	22	1/4	M6	202	PF203	0.27
202-10	5/8	17										202-10		
203												203		
203-11	11/16											203-11		0.26
SBPF204-12 204	3/4	20	91	71	8	2	9	7	25	5/16	M8	SB204-12 204	PF204	0.3
SBPF205-14 205-15	7/8											SB205-14 205-15	PF205	
205	15/16	25	95	76	9	2	9	7.5	27	5/16	M8	205		0.38
205-16	1											205-16		
SBPF206-18 206	1-1/8	30										SB206-18 206	PF206	
206-19	1-3/16		113	90	9	2.5	10.5	8	30	3/8	M10	206-19		0.62
206-20	1-1/4											206-20		
SBPF207-20 207-21	1-1/4											SB207-20 207-21	PF207	
207-22	1-5/16	35	122	100	10	2.5	10.5	8.5	32	3/8	M10	207-22		0.82
207	1-3/8											207		
207-23	1-7/16											207-23		
SBPF208-24 208-25	1-1/2											SB208-24 208-25	PF208	
208	1-9/16	40	148	119	12	3.5	13.5	9	34	1/2	M12	208		1.1

Unit No.	Shaft Dia.		Dimensions (mm)							Bolt size		Bearing No.	Housing No.	Mass (kg)
	d		L	P	A ₂	t	N ^Ø	S	B ₁					
	(in.)	(mm)												
SAPF201 201-8	1/2	12										SA201 201-8		0.29
202		15	82	64	7	2	7.5	6.5	28.6	1/4	M6	202	PF203	0.29
202-10	5/8	17										202-10		
203												203		
203-11	11/16											203-11		0.28
SAPF204-12 204	3/4	20	91	71	8	2	9	7.5	30.9	5/16	M8	SA204-12 204	PF204	0.31
SAPF205-14 205-15	7/8											SA205-14 205-15	PF205	
205	15/16	25	95	76	9	2	9	7.5	30.9	5/16	M8	205		0.41
205-16	1											205-16		
SAPF206-18 206	1-1/8	30										SA206-18 206	PF206	
206-19	1-3/16		113	90	9	2.5	10.5	9	35.7	3/8	M10	206-19		0.67
206-20	1-1/4											206-20		
SAPF207-20 207-21	1-1/4											SA207-20 207-21	PF207	
207-22	1-5/16	35	122	100	10	2.5	10.5	9.5	38.9	3/8	M10	207-22		0.87
207	1-3/8											207		
207-23	1-7/16											207-23		
SAPF208-24 208-25	1-1/2											SA208-24 208-25	PF208	
208	1-9/16	40	148	119	12	3.5	13.5	11	43.7	1/2	M12	208		1.3

Remarks: Ⓞ SBPF208 and SAPF208 have four bolt holes.